Finehope

Finehope

Finehope

Finehope

ISO9001

Certificate

FINEHOPE (XIAMEN) NEW MATERIAL TECHNOLOGY CO., LTD.

GB/T19001-2016/ISO9001:201

The manufacture of polyurethane foam products (Soft

foam products for construction machinery accessories

machinery accessories and sports equipment access

polyurethane foam products for building decoration

polyurethane foam products for mechanical parts; soft

floor mats for home and office use)

IATF16949

Certificate of Registration

nqa

Finehope自**2003**年起連續獲得**ISO 9001**證書。

IATF16949認證:

中國聚氨酯硬質泡沫建築材料供應商 Finehope於2021年通過了IATF16949汽車質量管理體系認證。50多個文件保證了新產品開發進度、試制和量產產品的質量、交貨時間和成本。

自2007年Finehope與卡特彼勒合作以來，Finehope在新產品導入中採用了汽車質量管理體系，使用了SPC、MSA、FMEA、APQP和PPAP五種工具，贏得了卡特彼勒高管的好評，並建立了長期的合作關係。迄今為止的長期合作夥伴關係。

Our Advandages

PU原材料研發能力

自2002年以來，Finehope一直致力於PU模壓泡沫產品的設計和製造。自主研發的配方材料和穩定的生產能力是品質保證的基礎。

Finehope可根據客戶個性化產品的定制需求，如硬度、彈性、支撐、手感、密度、顏色等理化性能的要求，隨時調整產品配方，並可做出符合配方要求的產品當然，好的配方還必須考慮最佳的性價比，對於新項目來說，PU配方的開發能力是保證產品開髮質量、交貨期和成本的關鍵條件。

自動化設備設計與製造能力

Finehope的自動化設備設計和製造能力在行業內是罕見的。通過參與新型PU注射混合設備的設計和生產線的自動化改造，確保在中國人口紅利降低的競爭下而人工成本不斷上升，生產效率也得以提高，人工和材料成本得以降低。此外，夾具、專用設備、自動化模具等關鍵設備的持續設計和製造能力也是Finehope在各方面處於領先地位的原因。

Finehope不斷降低成本和創新產品的能力可以幫助客戶帶來更大的價值，因此是眾多世界500強企業和行業領先企業可信賴的長期合作夥伴。

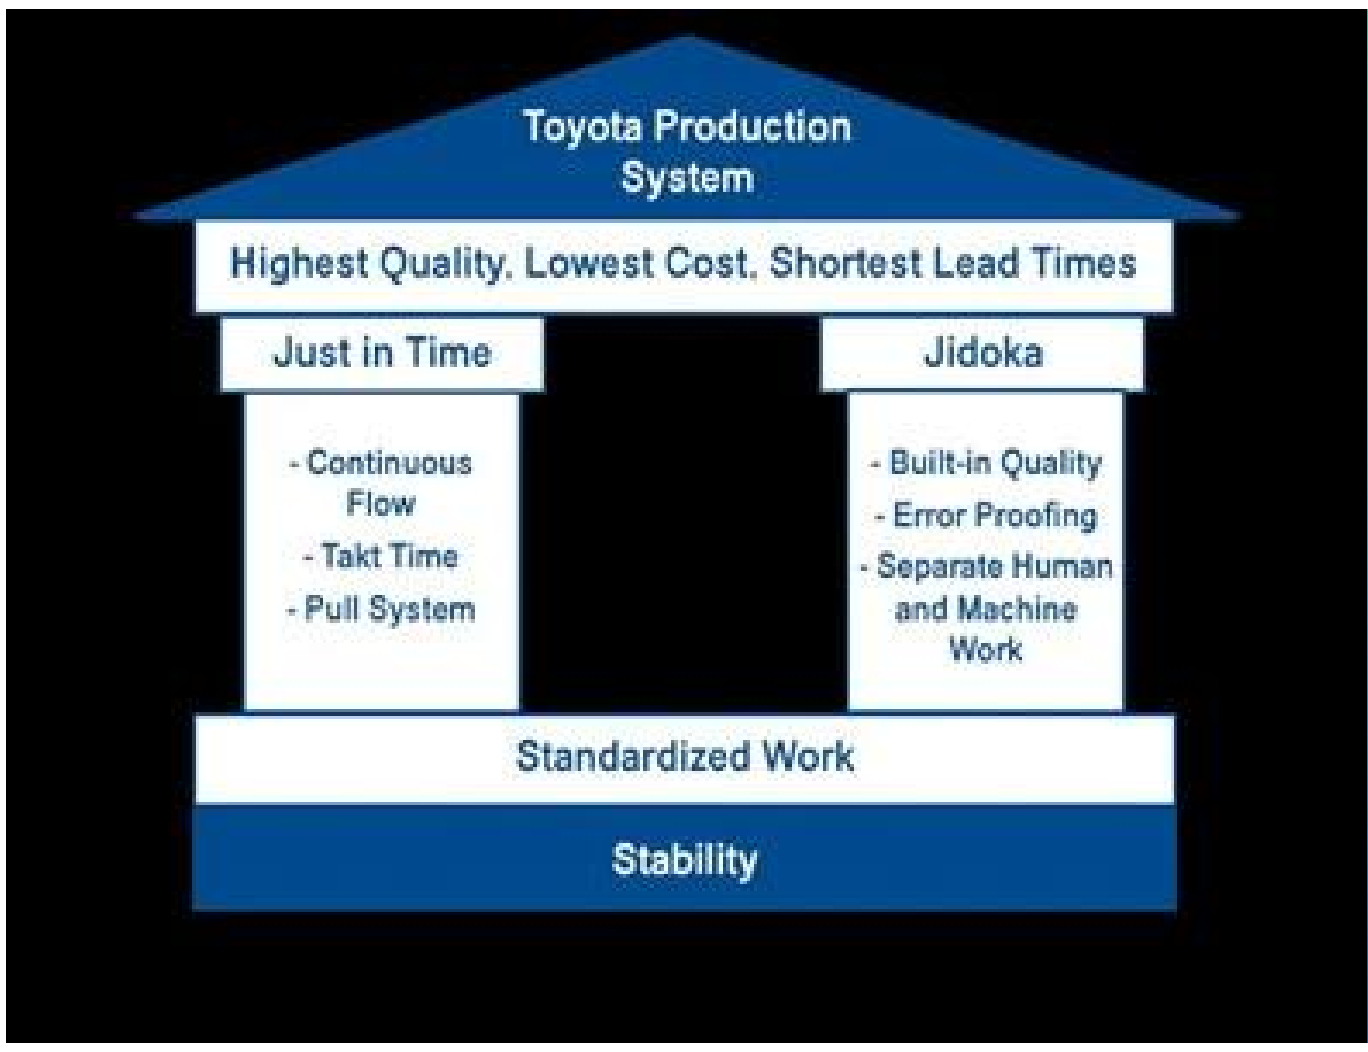

Toyota Production System
Highest Quality, Lowest Cost, Shortest Lead Times
Just in Time
- Continuous Flow
- Takt Time
- Pull System
Jidoka
- Built-in Quality
- Error Proofing
- Separate Human and Machine Work
Standardized Work
Stability

The S.M.A.R.T. goal formula

Specific	• Clearly identify the goal.
Measurable	• Define the goal in measurable terms.
Attainable	• Choose goals that are realistic and manageable.
Relevant	• Make sure the goal is something that is important to you.
Time-bound	• Define the time frame during which you will achieve the goal.

科學的管理能力

Finehope強調了豐田生產體系和企業輔導模式對於優化管理效率的重要性。持續改進全體員工、管理和生產人員的效率和素質得到有效、持續的提高，管理和生產成本不斷降低，但更重要的是效率和成本是通過持續改進培育員工成長，因為這是企業可持續發展的核心。

中國pu聚氨酯泡沫工廠 Finehope的精細化減少了客戶的麻煩，因為它減少了對人力流程系統的疏忽以及不斷積累專業經驗的能力，這可以確保所有新項目在最短的時間內完成。

Famous customer
Cooperation experience

Engineering Vehicle
BOYD CORPORATION
TVH
AIXAM
Honeywell
STIGA
CAT
Medical Equipment
Hill-Rom
INVACARE Yes, you can.
MAQUET GETINGE GROUP
DrPosture
Ki Mobility
Baby Supplies
Bumbo
Nûby
bugaboo
chicco
Hatch Baby
GRACO
Fitness Equipment
STAR TRAC expect different.
BOWFLEX
Other
HB&G BUILDING PRODUCTS
ergoDRIVEN
nuvo
PANDORA UNFORGETTABLE MOMENTS
CubeFit
Knoll

常問問題

1. 為什麼選擇Finehop?

Finehope是中國最專業的PU製造商，擁有專業的研發團隊、先進的PU生產設備、專業的檢測設備和完善的質量管理體系。我們與CAT、FIAT、TVH、STIGA等知名企業有12年的合作經驗。我們為他們提供從研發到生產的一站式服務，滿足他們的定制需求。

2、選擇Finehope有什麼優勢?

1）產品質量保證，交期保證，售後服務良好。

2）性價比高，開發效率快，專業誠信經營。

3）Finehope將進行所有測試分析，然後製定測試標準，以減少之間的質量標準爭議

客戶和製造商。

4）精益生產管理模式。

5）幫助客戶開發和設計新產品。

6）具有豐富的PU產品設計、加工經驗。

7) Finehope是中國高新技術企業，擁有國內和國際發明專利技術和知識產權財產。

3、Finehope與國內同行有什麼區別?

1）質量保證：先期質量策劃（APQP）。

2）Finehope擁有豐富的服務國際大企業的經驗。

3）擁有專業的聚氨酯材料科研團隊。

4）具有生產設備和模具的自主設計、製造和創新能力。

5）擁有負責質量保證體系和質量控制的工程師團隊。

4. Finehope與歐美同行有什麼區別?

1）擁有完善、成熟的配套供應鏈。

2）降低模具成本。

3）開發設計能力效率高，流程時間短。

4）成本優勢和良好的服務態度。

5、PU產品的應用有哪些?

汽車、工程機械、運動健身器材、醫療機械及日常家居用品等。

About us

OUR
SAMPLE
ROOM

Our Certification

厦門市成長型中小微企業

Finehope自2019年起連續被評為“厦門市成長型中小微企業”。這是厦門市政府根據Finehope的各項綜合指標、增長模式、行業品牌實力、良好的企業信譽等進行評分的結果，頒發此證書。這是Finehope在全市數千家中小企業中脱穎而出的證明。

厦門市專精特新創新型中小企業

自2020年起，凡和普連續被評為“厦門市專精特異創新型中小企業”。“專精特異創新”是指主業突出、專業能力強、研發創新能力強、發展潛力大的中小企業。主要集中在新一代信息技術、高端装備製造、新能源、新材料、生物醫藥等中高端產業。政府強調並認可凡宏的“專精、專創新”是為了鼓勵創新，實現專業化、改革化、專業化。

厦門市科技小巨人領軍企業

自2019年起，Finehope入選厦門市科技小巨人領軍企業。該證書由厦門市政府五部門聯合頒發。評選標準重點關注新一代信息技術、高端装備、新材料、新能源、生物新醫藥、節能環保、海洋高新技術等戰略性新興產業。獲此殊榮表明Finehope在新信息技術和新材料方面走在行業前列。

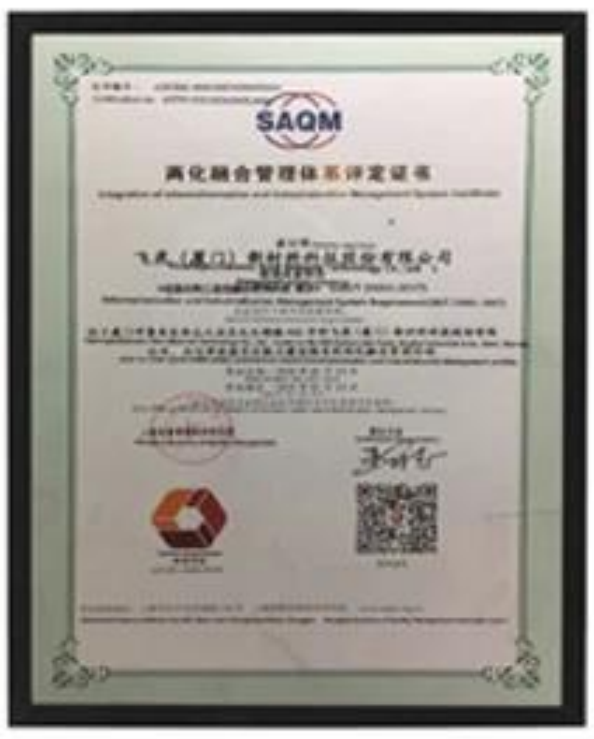

授予：飞虎（厦门）新材料科技股份有限公司

2019-2020年度

2019-2020

厦门市成长型中小微企业

Xiamen Growth-oriented Micro, Small & Medium Enterprises

厦门市工业和信息化局

厦门市中小企业管理办公室

二〇一九年五月

授予：飞虎（厦门）新材料科技股份有限公司

Granted: Finehope (Xiamen) New Material Technology Co. Ltd.

2020-2022年度

2020-2022

厦门市专精特新中小企业

Xiamen Specialized, Refining, Differentiate, Innovative SMEs

厦门市工业和信息化局

二〇二〇年八月

August 2020

厦门市科技小巨人领军企业

Xiamen Science And Technology Little Giant Leading Enterprise

证书

Certificate

企业名称：

发证时间：

Fiscal Year 2020

CERTIFICATION OF REGISTRATION

Registration Number

Device Listing#: See annex

Sungo FDA

食品藥品監督管理局認證

Finehope自成立以來每年都通過食品藥品監督管理局認證

2018年，食品藥品監督管理局批准意味著Finehope生產的產品獲得了外國政府證書（CFG），可以順利進入全球市場。

SAQM

两化融合管理体系评定证书

飞虎（厦门）新材料科技股份有限公司

兩化融合管理體系證書

該證書由廈門市政府評審，上海質量管理科學研究院頒發。

該證書體現了Finehope信息化與工業化深度融合的水平。Finehope將繼續走新路

安全生产标准化

Work Safety Standardization

证书

CERTIFICATE

安全生產標準化證書

生產安全對於預防或減少工作場所受傷、疾病和死亡的風險非常重要。

Finehope 總經理 Tiger Side:“只有那些繼續強調安全作為首要問題的製造工廠才能在當今市場上保持高生產力和競爭力。”

福建省排污许可证

Verified Supplier Certificate

Verified

Finehope (Xiamen) New Material Technology Co., Ltd.

飞虎（厦门）新材料科技股份有限公司

福建省排污許可證

排污許可證是所有排污單位的“身份證”，由廈門市環保局頒發。

習近平總書記強調，“要像保護眼睛一樣保護生態環境，像對待生命一樣對待生態環境”。李克強總理表示：“環境污染是民生之禍、人心之痛。

第三方——**TUV**認證

自2007年起，Finehope連續通過TUV認證，成為阿里巴巴認證供應商。

認證供應商是經過阿里巴巴平台權威實力認證的優質供應商。通過線上線下現場審核，對商戶企業資質、產品資質、企業能力等綜合實力進行審核驗證。

Quality Assurance

UNIVERSAL TESTING MACHINE(UTM)

Tensile Test



Tear Resistance Test



Compressive Strength





Indentation Force Deflection

INSPECTION STANDARD

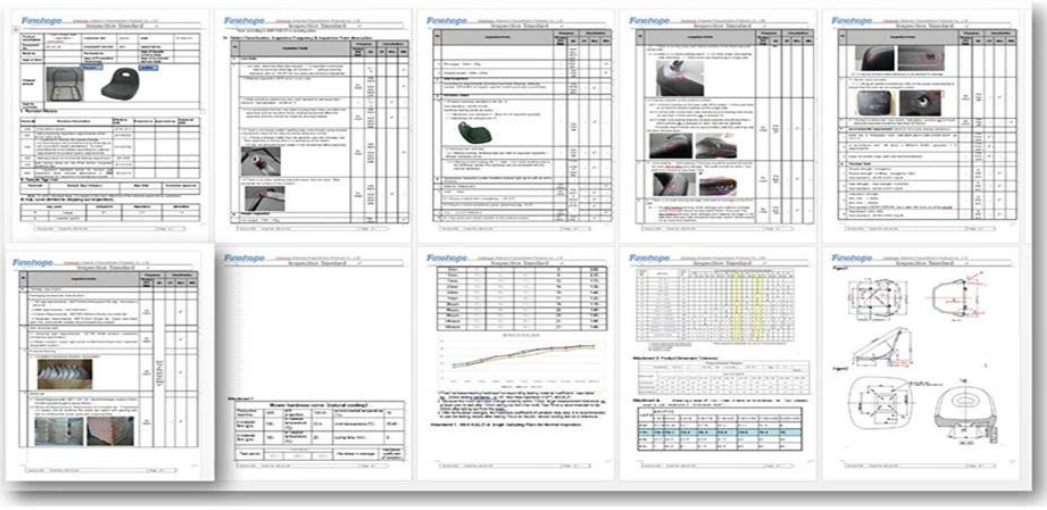

MATERIAL PERFORMANCE TEST REPORT

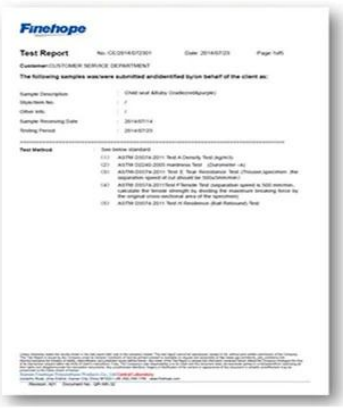

Finehope

Test Report No.:GE/2014/07/201 Date: 2014/07/23 Page:1of5

Customer:CUSTOMER SERVICE DEPARTMENT

The following samples was/were submitted and identified by/on behalf of the client as:

Sample Description	: Child seat Affinity Cruiser(multi)purple)
Style Item No.	: /
Other Info.	: /
Sample Receiving Date	: 2014/07/14
Testing Period	: 2014/07/23

Test Method : See below standard

(1) ASTM D3574-2011 Test A-Density Test (kg/m3)

(2) ASTM D3574-2005 Hardness Test (Durometer -A)

(3) ASTM D3574-2011 Test E Tear Resistance Test (Thicker specimen, the force to continue tearing a notch already started)

(4) ASTM D3574-2011Test F Tensile Test (elongation caused to 500 mm/min, calculate the tensile strength by dividing the maximum broadening force by the original cross-sectional area of the specimen)

(5) ASTM D3574-2011 Test H-Resilience (Ball Rebound) Test

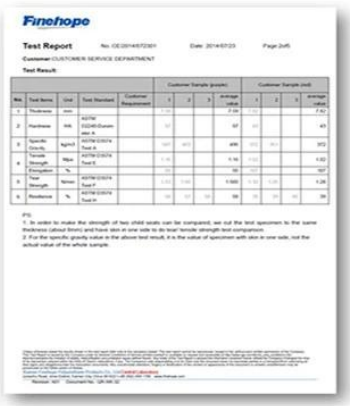

Finehope

Test Report No.:GE/2014/07/201 Date: 2014/07/23 Page:2of5

Customer:CUSTOMER SERVICE DEPARTMENT

Test Result:

No.	Test Items	Unit	Test Standard	Customer Requirement	Customer Sample (purple)				Customer Sample (red)			
					1	2	3	average value	1	2	3	average value
1	Thickness	mm			7.09			7.10				
2	Hardness	HA	ASTM D3574-Durometer A		57			57	43			43
3	Specific Gravity	kg/m3	ASTM D3574 Test A		327	321		324	373	371		372
4	Tensile Strength	Mpa	ASTM D3574 Test E		1.16			1.16	1.02			1.02
	Elongation	%			92			92	107			107
5	Tear Strength	N/mm	ASTM D3574 Test F		1.52	1.50		1.510	1.31	1.30		1.26
6	Resilience	%	ASTM D3574 Test H		58	57	59	58	39	39	40	39

PS:

1. In order to make the strength of two child seats can be compared, we cut the test specimen to the same thickness (about 8mm) and have skin in one side to do tear/ tensile strength test comparison.
2. For the specific gravity value in the above test result, it is the value of specimen with skin in one side, not the actual value of the whole sample.

Finehope

Test Report No.:GE/2014/07/201 Date: 2014/07/23 Page:3of5

Customer:CUSTOMER SERVICE DEPARTMENT

Sample Picture

This picture is only used with the formal report from Finehope.

Advanced Product Quality Planning

Date: 01-Oct-17

Customer	[redacted]
Location	New Zealand
Customer Code	G1019
Risk Assessment	
New : Site ☐ Technology ☐ Process ☐	
Other Risks ☐	

Project	[redacted]
Finehope Contact	Wendy Yang
Part No.	[redacted]
Part Name	G1019Y04
Change Level/Date	
User Plant(s)	Finehope

Core Team Members	Company/Title	Phone/Fax/E-Mail
Tiger Xu	G.M.	[redacted]
Yibin Lim	Vice G.M.	[redacted]
Cindy Wu	Sales Manager	cindy@finehope.com
Liangquan Wan	Project Manager	
Wendy Yang	Sales	wendy@finehope.com

Build Level	Material Required Date	Quantity	No. Concurred SRCs	No. Concurred Majors		
Product Design and Develop	21-Jun-21	10				
Product and Process Validat	25-Jun-21	15				

APQP Deliverable	Finehope APQP Reference Only	G Y R	Project Need Date	Supplier Timing Date	Actual Closure Date	Supplier Lead Resp Initials	Finehope Acceptance Complete	Remarks or Assistance Required
AIAG APQP Phase 2 - Product Design and Development								
1. Project Timeline (Synchronized w/Production Time Plan	2030	G	20-Jun-21	21-Jun-21	21-Jun-21	22-Jun-21	23-Jun-21	/
2. Customer Inputs / Requirements	2030	G	23-Jun-21	24-Jun-21	24-Jun-21	25-Jun-21	26-Jun-21	/
3. Warranty & Quality Mitigation Plan	2030	G	24-Jun-21	25-Jun-21	25-Jun-21	26-Jun-21	27-Jun-21	/
4. Customer Specific Requirements	2050	G	25-Jun-21	26-Jun-21	26-Jun-21	27-Jun-21	28-Jun-21	/
5. Design FMEA	2080	G	26-Jun-21	27-Jun-21	27-Jun-21	28-Jun-21	29-Jun-21	/
6. Preliminary Bill of Materials (BOM)	2090	G	27-Jun-21	28-Jun-21	28-Jun-21	29-Jun-21	30-Jun-21	/
7. Prototype Control Plans	2110	G	28-Jun-21	29-Jun-21	29-Jun-21	30-Jun-21	1-Jul-21	/
8. Prototype Builds	2110	G	29-Jun-21	30-Jun-21	30-Jun-21	1-Jul-21	2-Jul-21	/
9. Design Verification Plan & Report (DVP&R)	2120	G	30-Jun-21	1-Jul-21	1-Jul-21	2-Jul-21	3-Jul-21	/
10. Design / Process Review	2130	G	1-Jul-21	2-Jul-21	2-Jul-21	3-Jul-21	4-Jul-21	/
11. Team Feasibility Commitment	2130	G	2-Jul-21	3-Jul-21	3-Jul-21	4-Jul-21	5-Jul-21	/
12. APQP Status Sub-Supplier	2130	G	3-Jul-21	4-Jul-21	4-Jul-21	5-Jul-21	6-Jul-21	/
13. Production Drawing & Specifications	2220	G	4-Jul-21	5-Jul-21	5-Jul-21	6-Jul-21	7-Jul-21	/
14. Subcontractor Purchase Orders (Customer Tooling	2250	G	5-Jul-21	6-Jul-21	6-Jul-21	7-Jul-21	8-Jul-21	/
15. Facilities, Equipment, Tools and Gages	2260	G	6-Jul-21	7-Jul-21	7-Jul-21	8-Jul-21	9-Jul-21	/
AIAG APQP Phase 3 - Process Design and Development								
16. Product/Process and Quality System Review	3030	G	9-Jul-21	10-Jul-21	10-Jul-21	10-Jul-21	11-Jul-21	/
17. Manufacturing Process Flow Chart	3040	G	11-Jul-21	12-Jul-21	12-Jul-21	12-Jul-21	13-Jul-21	/
18. Process FMEA	3100	G	13-Jul-21	14-Jul-21	14-Jul-21	14-Jul-21	15-Jul-21	/
19. Pre-Launch Control Plan	3110	G	15-Jul-21	16-Jul-21	16-Jul-21	16-Jul-21	17-Jul-21	/
20. Process Work Instructions	3120	G	17-Jul-21	18-Jul-21	18-Jul-21	18-Jul-21	19-Jul-21	/
21. Measurement Systems Evaluation	3130	G	19-Jul-21	20-Jul-21	20-Jul-21	20-Jul-21	21-Jul-21	/
22. Packaging Specifications & Approvals	3160	G	21-Jul-21	22-Jul-21	22-Jul-21	22-Jul-21	23-Jul-21	/
23. Manufacturing Team Training	3170	G	23-Jul-21	24-Jul-21	24-Jul-21	24-Jul-21	25-Jul-21	/
AIAG APQP Phase 4 - Product and Process Validation								
24. Subcontractor PPAP Approval	4005	G	9-Jul-21	10-Jul-21	10-Jul-21	10-Jul-21	11-Jul-21	/
25. Production Control Plan	4008	G	11-Jul-21	12-Jul-21	12-Jul-21	12-Jul-21	13-Jul-21	/
26. Production Readiness Review (PRR)	4009	G	13-Jul-21	14-Jul-21	14-Jul-21	14-Jul-21	15-Jul-21	/
27. Production Trial Run (PTR)	4010	G	15-Jul-21	16-Jul-21	16-Jul-21	16-Jul-21	17-Jul-21	/
28. Process Capability Studies	4030	G	17-Jul-21	18-Jul-21	18-Jul-21	18-Jul-21	19-Jul-21	/
29. Production Validation Plan & Report (PVP&R)	4090	G	19-Jul-21	20-Jul-21	20-Jul-21	20-Jul-21	21-Jul-21	/
30. Production Part Approval (PPAP)	4110	G	21-Jul-21	22-Jul-21	22-Jul-21	22-Jul-21	23-Jul-21	/
AIAG APQP Phase 5 - Feedback, Assessment and Corrective Action								
31. Initial Production Shipment	5005	G	28-Jul-21	30-Jul-21	30-Jul-21	30-Jul-21	31-Jul-21	/
32. Production Ramp-up Plan	5005	G	31-Jul-21	2-Aug-21	2-Aug-21	2-Aug-21	3-Aug-21	/
33. Full Production Date	5005	G	5-Aug-21	7-Aug-21	7-Aug-21	7-Aug-21	8-Aug-21	/
34. Conduct Lessons Learned	5005	G	8-Aug-21	10-Aug-21	10-Aug-21	10-Aug-21	11-Aug-21	/

Design Failure Mode and Effects Analysis

(Design FMEA)

FMEA No.:
DFMEA-001

PDject.Name: injection moulding | Procedure responsible dept: Production Dept | Made: Xiaodong Qiu

Model year/vehicle types: CRV | Soybean Milk Maker | Important date: Nov.10th.2015 | FMEA Date: Nov.10th.2015

People participated: Develop dept:Gaolin Wei | Sales:Haiyan Wu | PC:Jiannan Yan | Technology Dept:Jianyu Zhou | Purchaser:Yuanyuan Gou | Production dept:Shuwen Dong | QC:Bingxiang Zheng

procedure function requirements	Potential failure mode	Potential effects analysis	severity (S)	grade	potential causes/mechanisms of failure	frequency (O)	Current prevention process control	Current detection process control	detectivity (D)	RPN	recommended measures	Responsibility and target completion date	action results				
													Action Taken	severity (S)	frequency (O)	difficult to check (D)	RPN
scyphus	size changes of handle	handle cover fall off	6	A	PP size change	6	By adjusting the product of the injection molding process, and measure or test the clasp of product size	measure and test product size	3	108	Add the number of button bit in handle design, in order to keep the connection strength	Xiaodong Qiu 2015/08/25	By adjusting the product of the injection molding process, and measure or test product size	6	1	1	6
scyphus	warpage of scyphus handle	Poor appearance break	4	C	high handle wall	6	Add the stiffener to handle wall to prevent deformation	measure and test product size	2	48	If this problem appears, make improvement by Adding the stiffener	Xiaodong Qiu 2015/09/30	Add the stiffener to handle wall to prevent deformation	4	2	1	8
scyphus	Deformation of cup-mouth	Micro switch without power	8	A	PP material deformation, Resulting in a perpendicular direction to connect the cup and handle inward deformation, So that both sides of the tilt, the micro switch column opposite sink, and	3	Adjust the injection molding process, to prevent extrusion	measure and test cup-mouth size	3	72	in the cup packing control the direction of the lateral dimension of no force, stipulate the way of packing	Xiaodong Qiu 2015/09/10	stipulate the cup use egg cell methods to put the packing which do not squeeze each other	8	1	3	24

Process Failure Mode and Effects Analysis

(PFMEA)

潜在失效模式和后果分析

FMEA No.FMEA20150326-01

Item:Welding improvement
项目:焊接改善

Process Responsibilities: Production welding group
过程职责：生产部焊接组

Maker:Wenrong-Huang

Model year/project
型号年/项目

Key Dates
关键日期

FMEA Date (Original):2015.03.25

Item 项目 / Request 问题	Potential failure mode 潜在失效模式	Potential consequences of failure modes 失效的潜在后果	Severity 严重度	Grade 等级	Potential causes of failure 失效的潜在原因	Occurrence degree 发生度	Current process control and Prevention 现在过程预防控制	Current process control detection 现在过程探知实例	Detection rate 探测率	RPN	Suggest measures 建议措施	Responsibility and target completion date 职责及目标完成日期	Measure results 措施结果				
													Measures and effective date 措施及生效日期	Severity 严重度	Incidence rate 发生率	Detection degree 探测度	RPN
Clamping (clamping required is in place, no missing or wrong loaded) 装夹（装夹需到位，无漏装、错装）	Clamping is not in place 装夹不到位	Size/NG 尺寸NG	6	B	●Staff negligence 人员作业疏忽 ●Fixture for bad 夹具存放不良	4	●Make the operation standard book 制定作业标准书 Make maintenance standards, regular maintenance 制定保养基准，定期保养，维护	●Visual inspection 目视检测 ● Finished 100% full inspection 完制100%全检	6	144	●Pre-service training of staff 人员岗前培训 ● Regular maintenance 二级定期维护			6	3	4	72
		Welding error, leak welding, welding deviation, affect the assembly or use function 焊接错误，漏焊，焊接偏移，影响装配或使用功能	8	A	●Staff negligence 人员作业疏忽 ●Fixture for bad 夹具存放不良 ●Fixture inaccurate 夹具定位不准确	4	●Make the operation standard book 制定作业标准书 ●Make maintenance standards, regular maintenance 制定保养基准，定期保养，维护 ●Regular checking of fixture 治具定期点检确认	Visual inspection 目视检测	6	192	●Pre-service training of staff 人员岗前培训 ●Regular maintenance 二级定期维护 ●Make inspection checklist for fixture 制作治具点检作业标准			8	3	4	96
	Attachments missing 附件漏装	Affect product strength or influence the assembly 影响产品强度或影响装配	8	A	Staff negligence 作业人员疏忽	3	Make the operation standard book 制定作业标准书	Visual inspection 目视检测	4	96	Final inspection personnel do 100% full inspection for each bead with mark 终检人员100%全检，并			8	2	2	32
	Attachment error 附件装错	influence assembly 影响装配	7	A	No mistake proofing fixture 治具无防错	3	Make the operation standard book 制定作业标准书	Visual inspection 目视检测	6	126	●Increase the mistake proofing devices 增加防错装置 ●Inspection for final inspection tools 终检检具检测			7	2	4	56
	False welding 假焊	Lack of strength, affect the use of function 强度不足，影响使用功能	9	A	Current, voltage, welding angle, speed setting is not reasonable 电流、电压、焊接角度、速度设定不合理	4	●Welding process guidance making 制作焊接工艺指导书 ●Condition confirmation check 设定条件确认点检 ●Confirm the failure test on a regular basis.	Destructive testing 破坏试验检测	8	288	After the procedure is set up to confirm the processing conditions, the execution and marking of the failure test is performed. 首检作业设定加工条件确认			9	3	4	108

Production Device

KRAUSS MAFFEI

Finehope has successively introduced many of the world's most advanced German KraussMaffei high-pressure injection machines since 2010.



Reaction Injection Molding (RIM)
High Pressure Machine
KRAUSS MAFFEI
Made in Germany!

Self-invented fully automatic production line

Finehope has independently developed a number of fully automatic PU injection production lines since 2010. These production lines reduce production costs and meet customer delivery requirements.

Welding Robots

Since 2016, Finehope has continued to purchase welding robots and automatic fixture turntables for welding metal parts. The independent processing of accessories saves the waiting time and procurement cost of outsourcing processing.

CNC Machine

Finehope has continued to purchase CNC equipment since 2016. CNC (Computer Numerically Controlled) machining is a manufacturing process in which pre-programmed computer software dictates the movement of factory tools and machinery. Using this type of machine versus manual machining can result in improved accuracy, increased production speeds, enhanced safety, increased efficiency and most importantly, help customers save costs and improve product quality.

Mould Release Agent Painting Robot

Since 2019, Finehope has purchased robots for spraying water-based release agents to improve the working environment, improve spraying quality and material utilization, and reduce labor costs.

3D printer

Finehope started to purchase 3D printers in 2015. 3D printing can realize rapid proofing of new product prototypes and templates for resin molds, and can also be used for faster and cheaper small batch production.

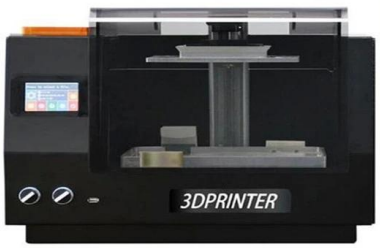

Social Responsibility

- **Audited by Sedex**

(Supplier business ethics information exchange)

Labor standard · health and safety · Environmental protection · Business ethics practice

- **Public-spirited**

Voluntary tree planting after Super Typhoon Meranti in 2016

A VALUE-BASED COMPANY

CUSTOMER FIRST

TEAMWORK

EMBRACE CHANGES

PASSION

INTEGRITY

COMMITMENT